
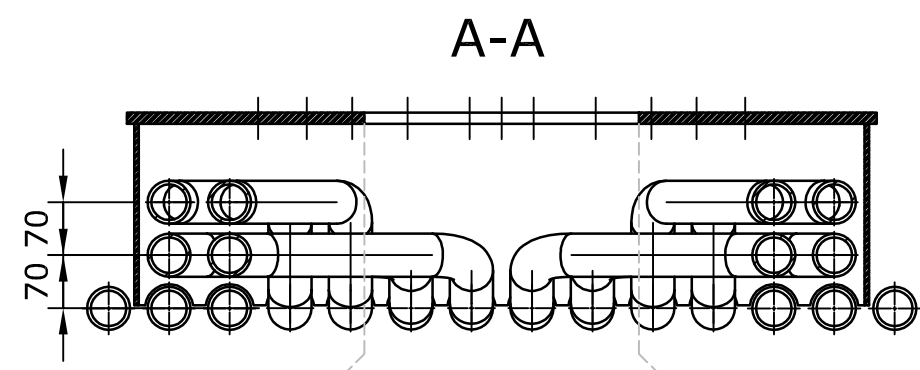
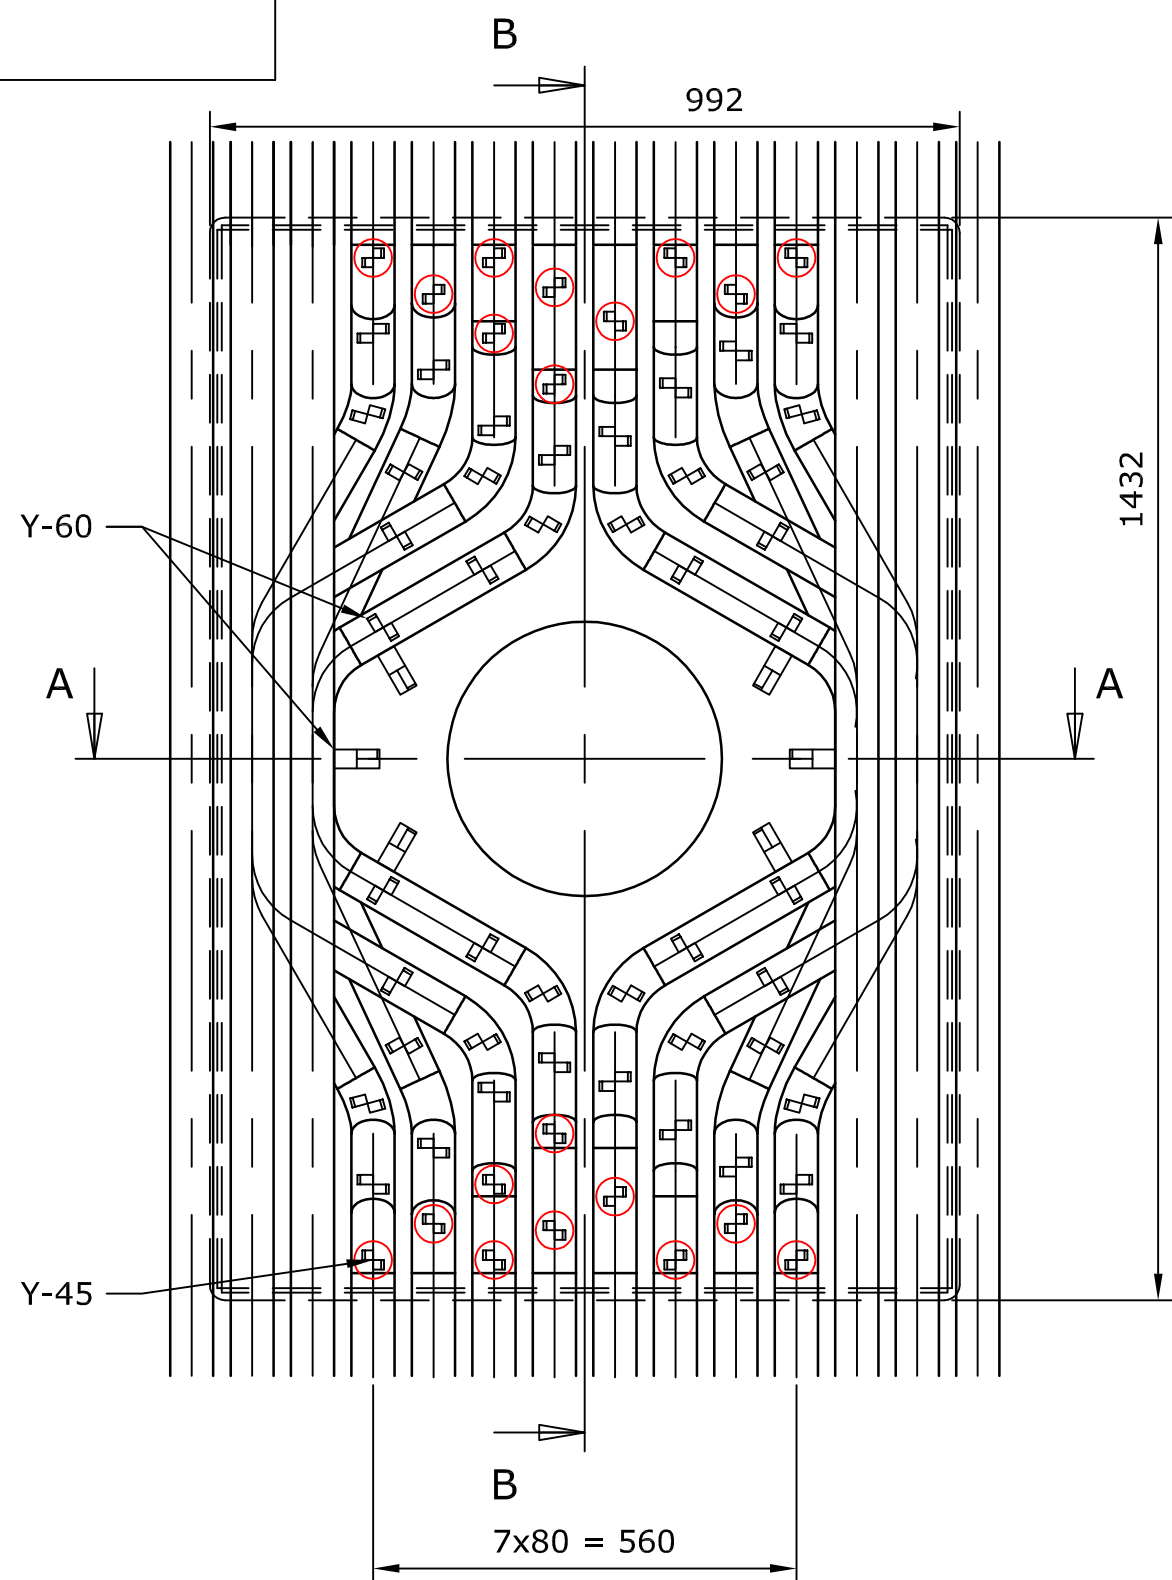





- Pos.: 18.1 - Auxiliary burner - 1st pass REFRACTORY AREA
- Left and right sidewall - 2 pcs.
- Y-60 anchors 25x5 ~ 51 pcs.
- Y-45 anchors 25x5 ~ 20 pcs.

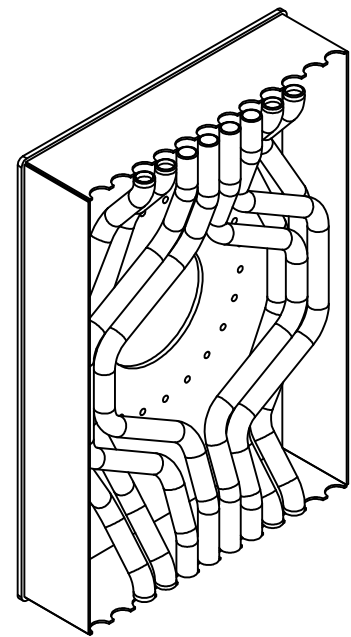

A-A

B-B

- Pos.: 18.2 - Manhole Ø660 OUTSIDE REFRACTORY AREA
- Left and right sidewall - 16 pcs.
- Y-50 anchors 25x5 ~ 28 pcs.
- Y-35 anchors 25x5 ~ 8 pcs.

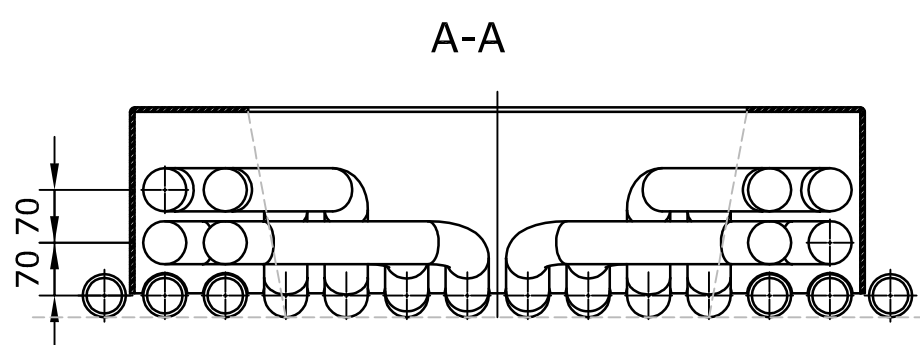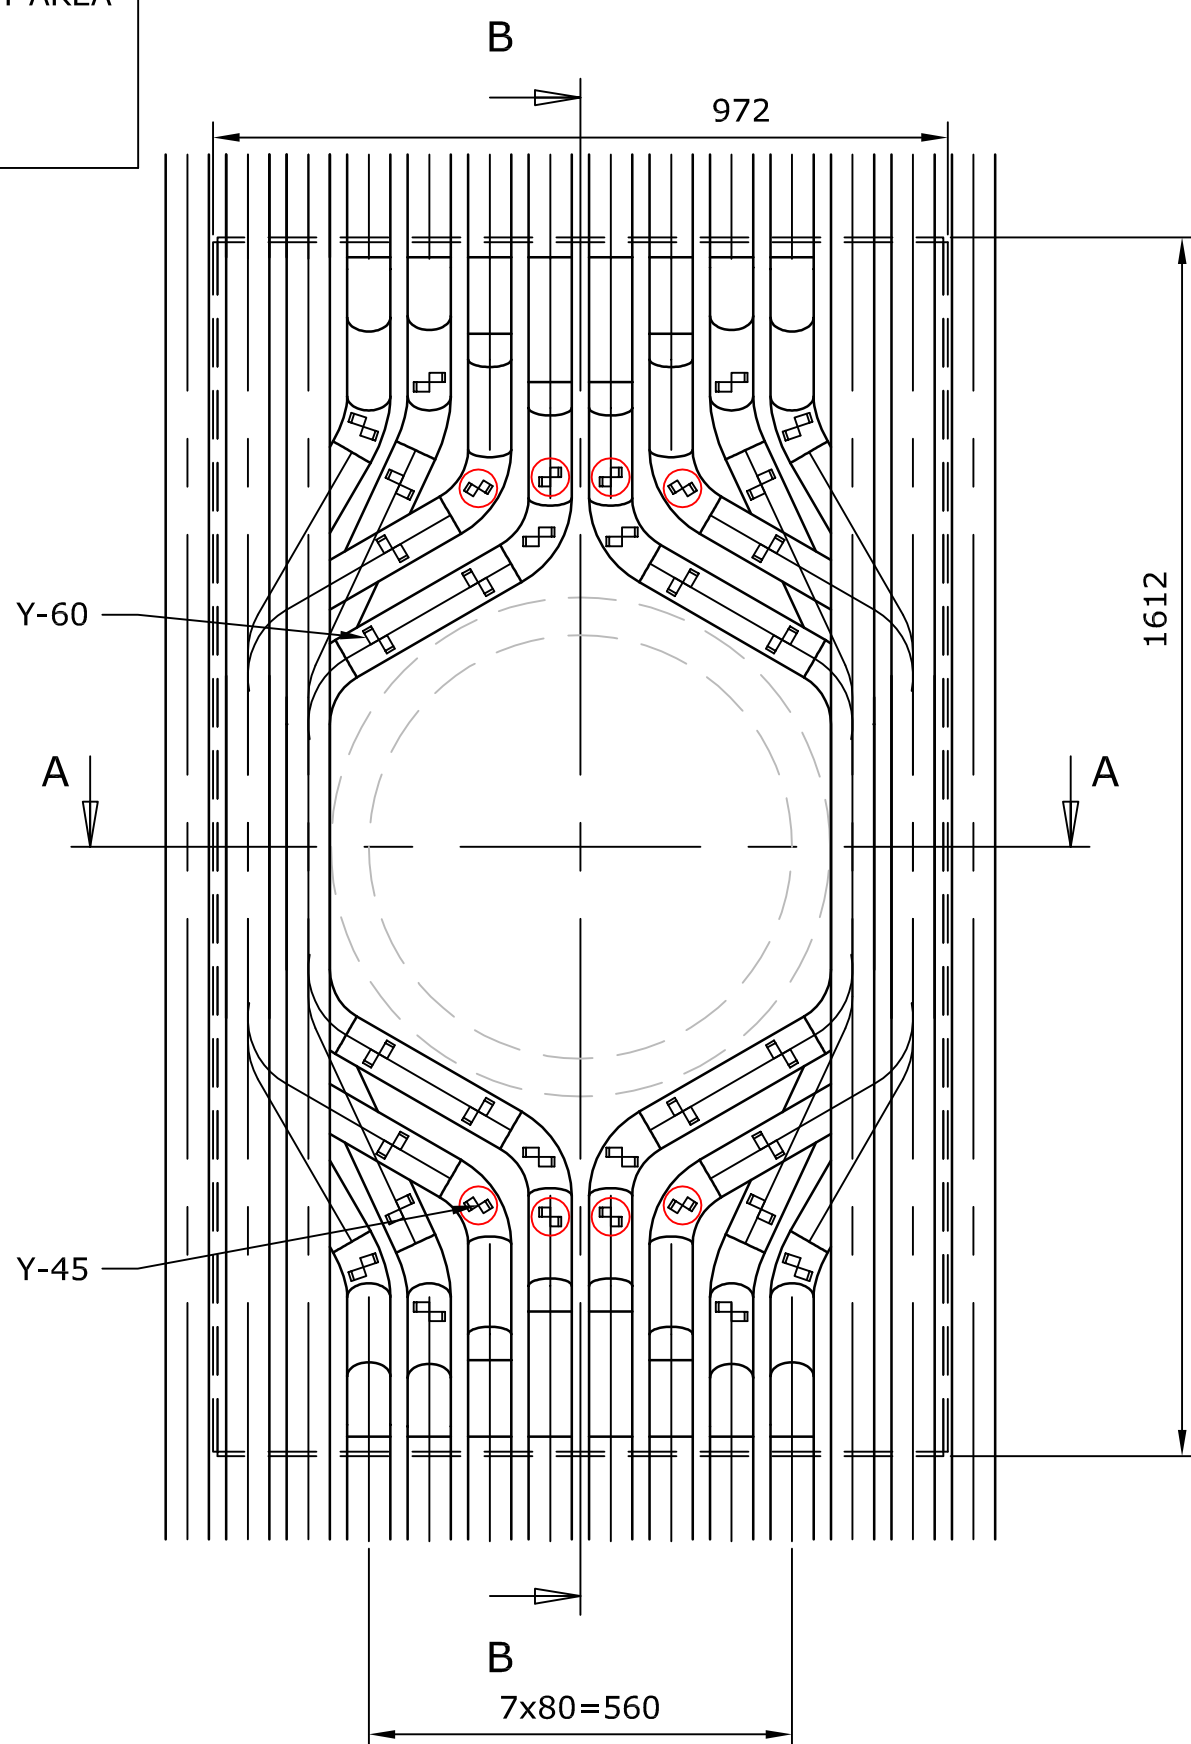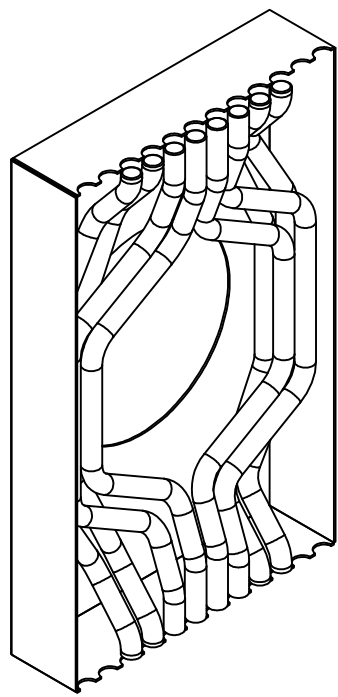


A-A


B-B

Anchors have to be kept min. 10 mm behind top tube.


- Pos.: 18.9.1 - Inspection glass REFRACTORY AREA
- Front wall (RS) - 1 pcs.
- Y-45 anchors 25x5 ~ 28 pcs.
- Y-50 anchors 25x5 ~ 6 pcs.

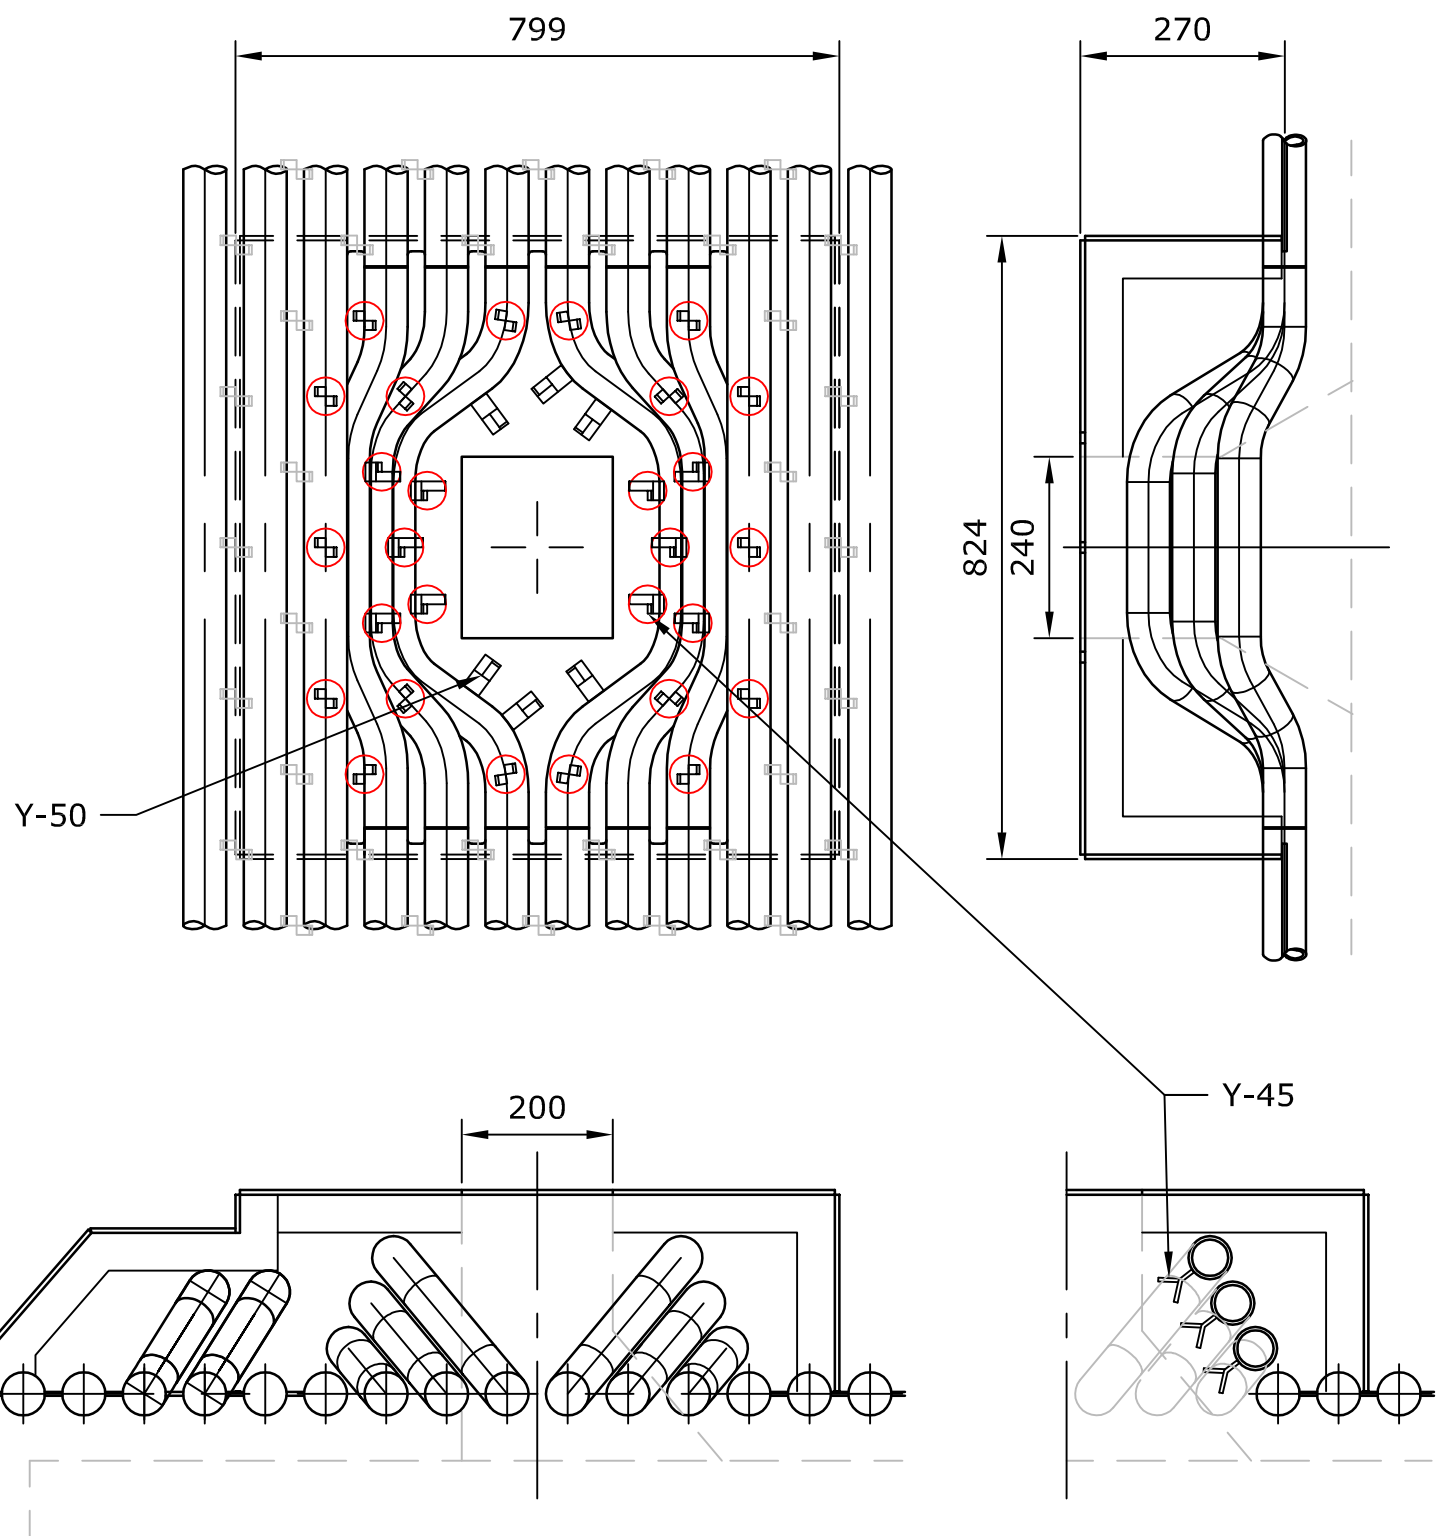


- Pos.: 18.9.2 - Inspection glass REFRACTORY AREA
- Front wall (LS) - 1 pcs.
- Y-45 anchors 25x5 ~ 28 pcs.
- Y-50 anchors 25x5 ~ 6 pcs.

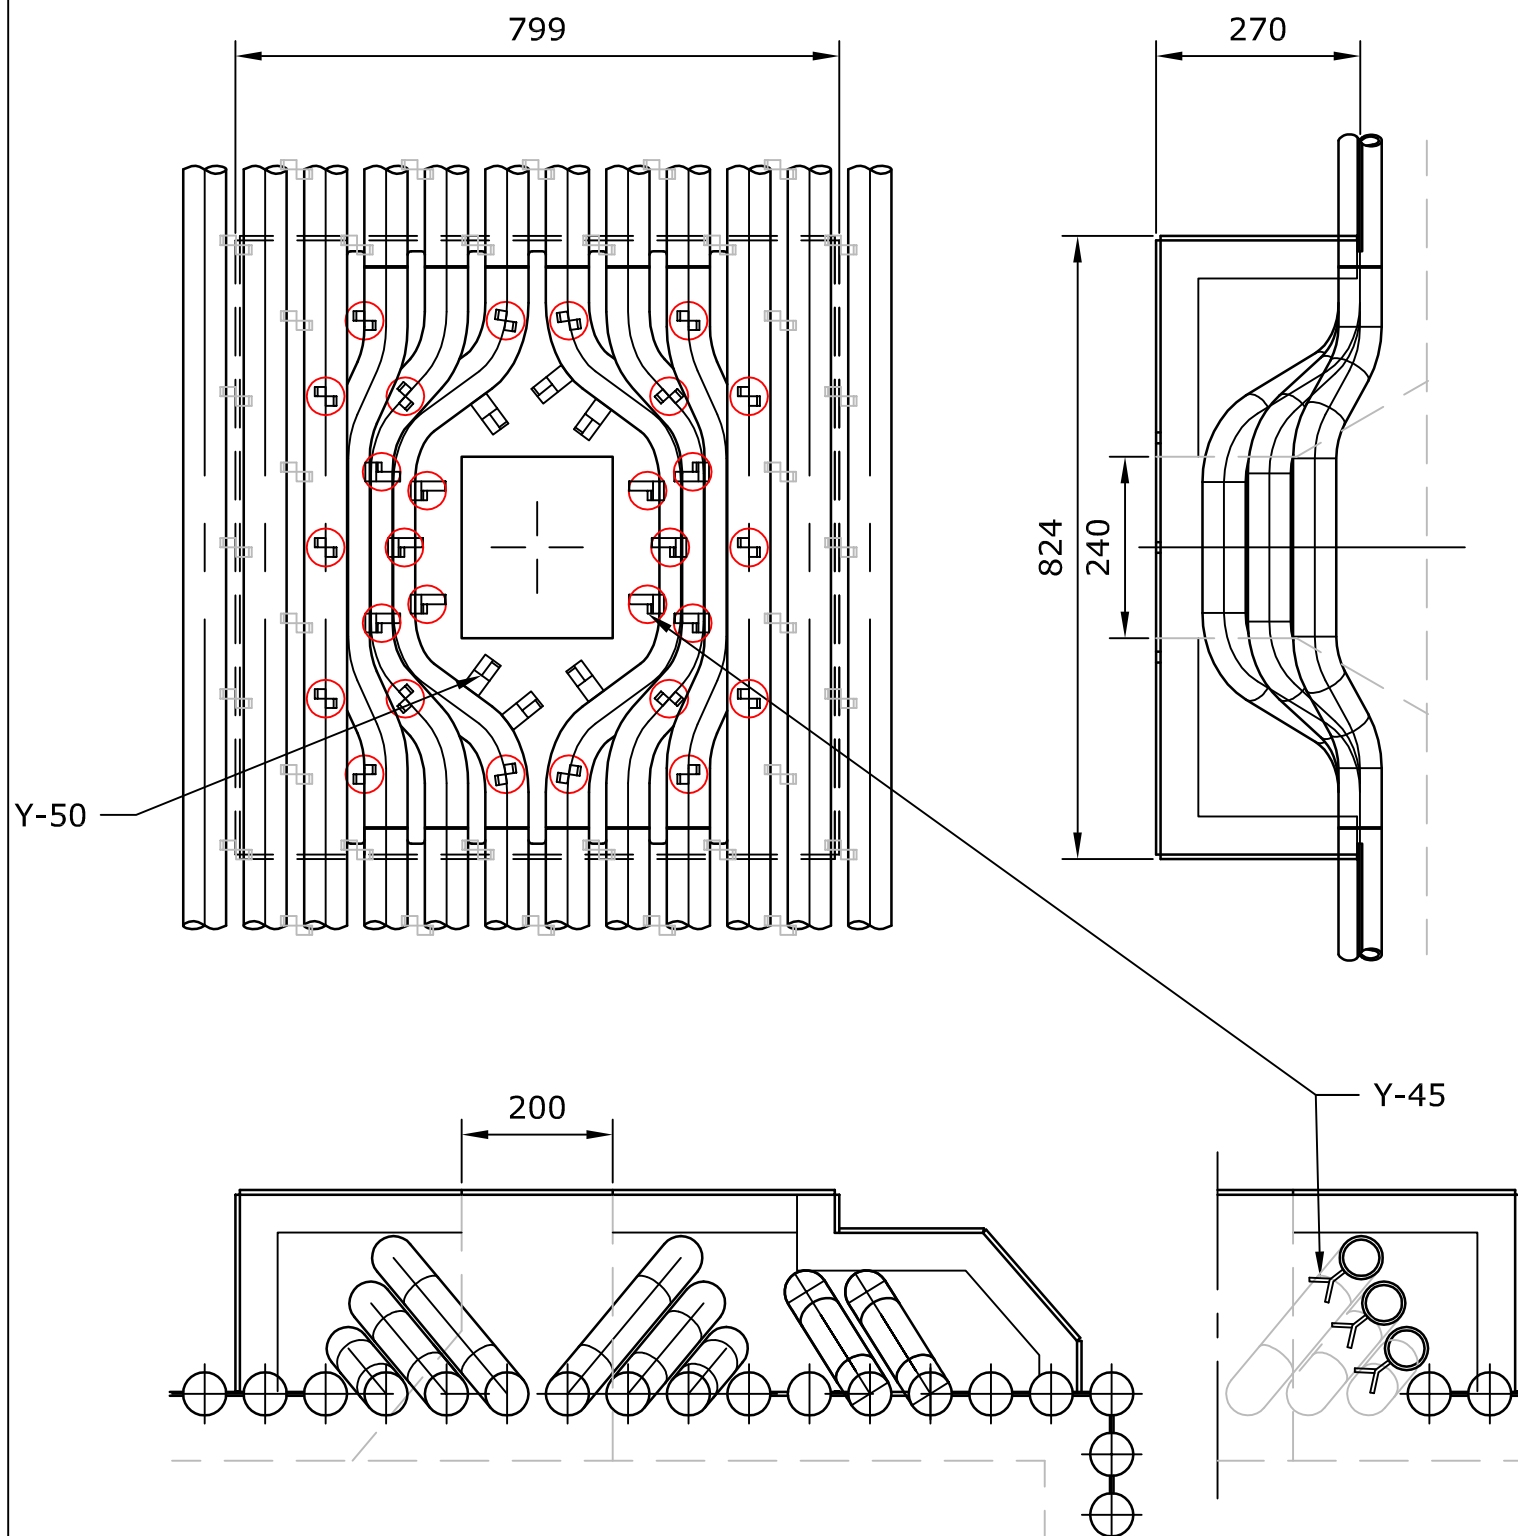

- Pos.: 18.9.3 - Inspection glass REFRACTORY AREA
- Rear wall - 1 pcs.
- Y-45 anchors 25x5 ~ 28 pcs.
- Y-50 anchors 25x5 ~ 6 pcs.

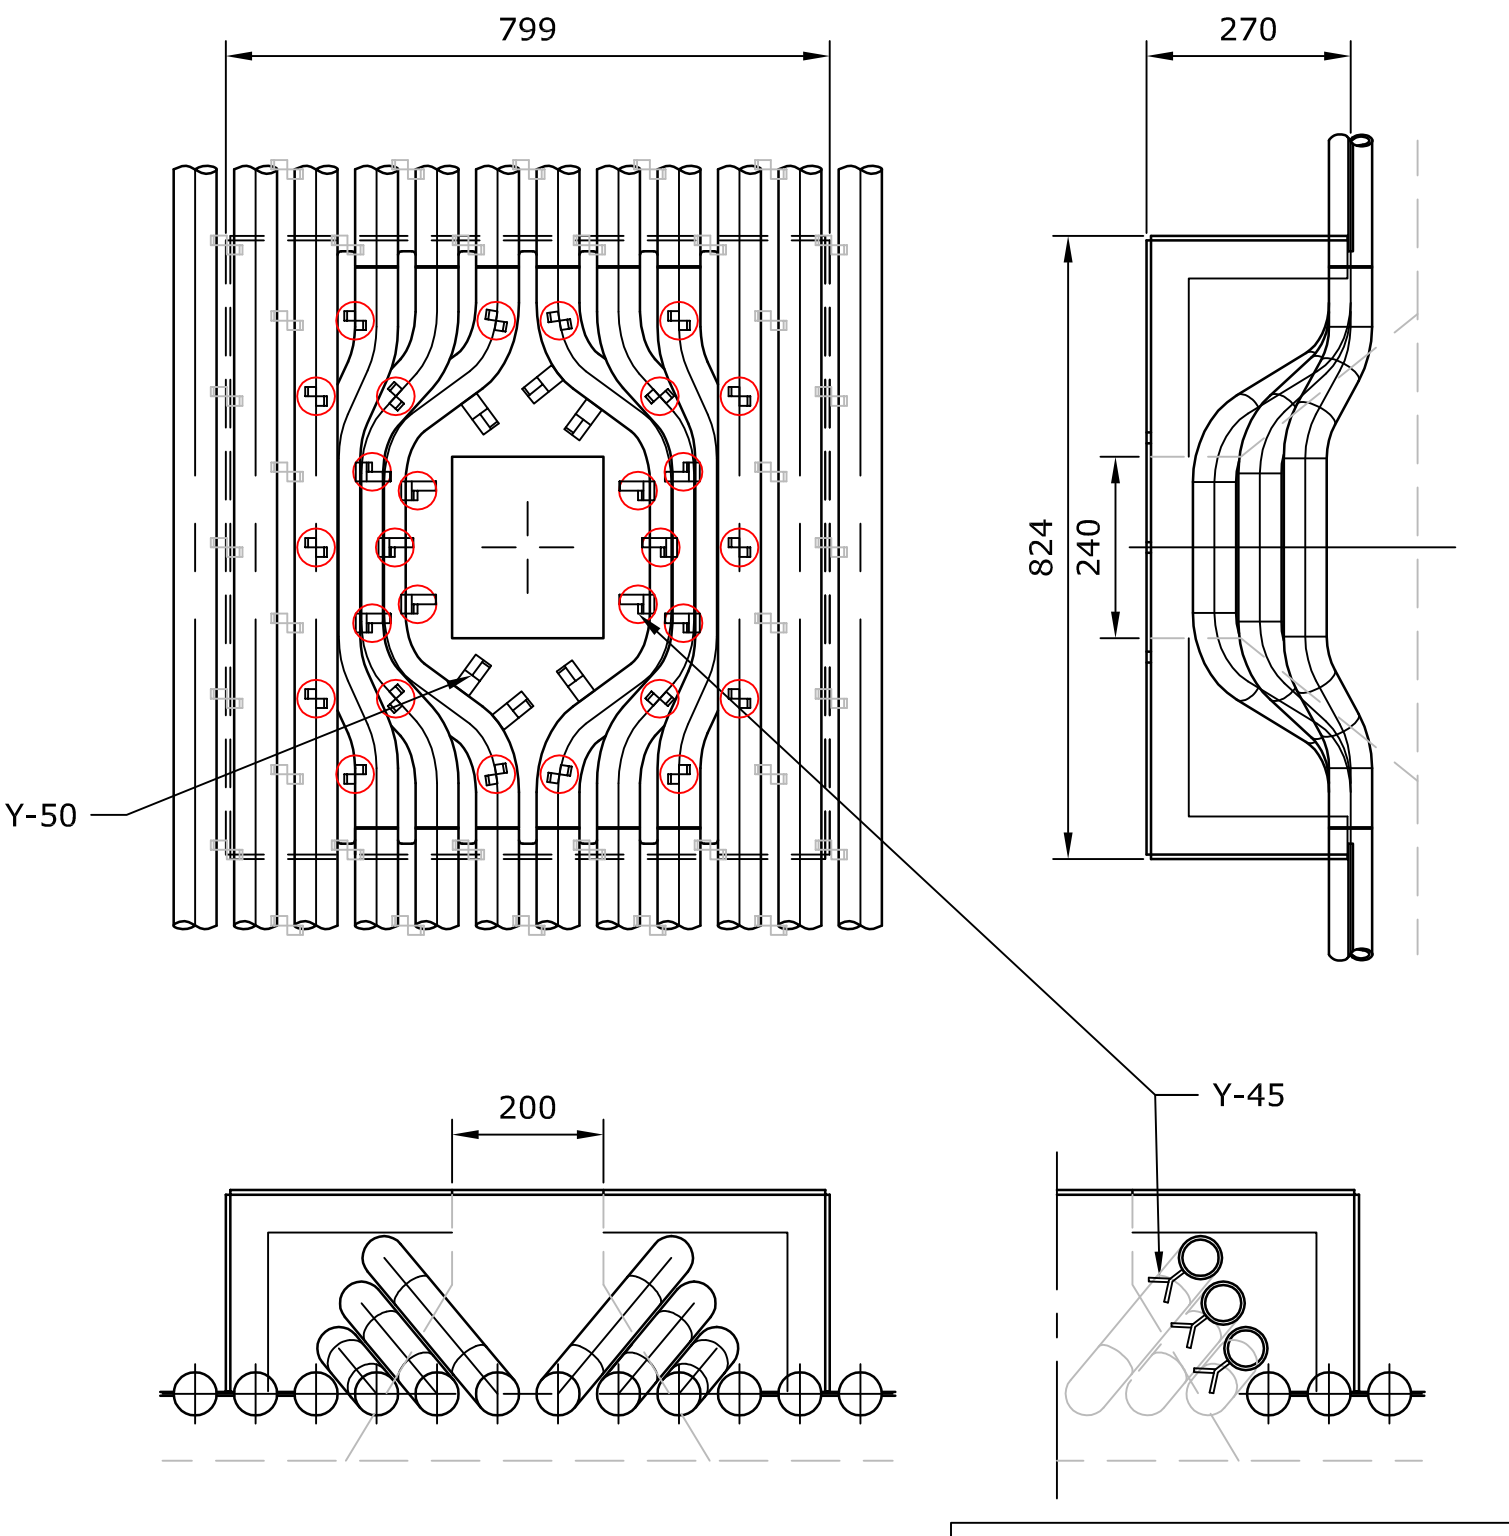

- Pos.: 18.9.4 - Camera REFRACTORY AREA
- Rear wall - 1 pcs.
- Y-45 anchors 25x5 ~ 28 pcs.
- Y-50 anchors 25x5 ~ 6 pcs.

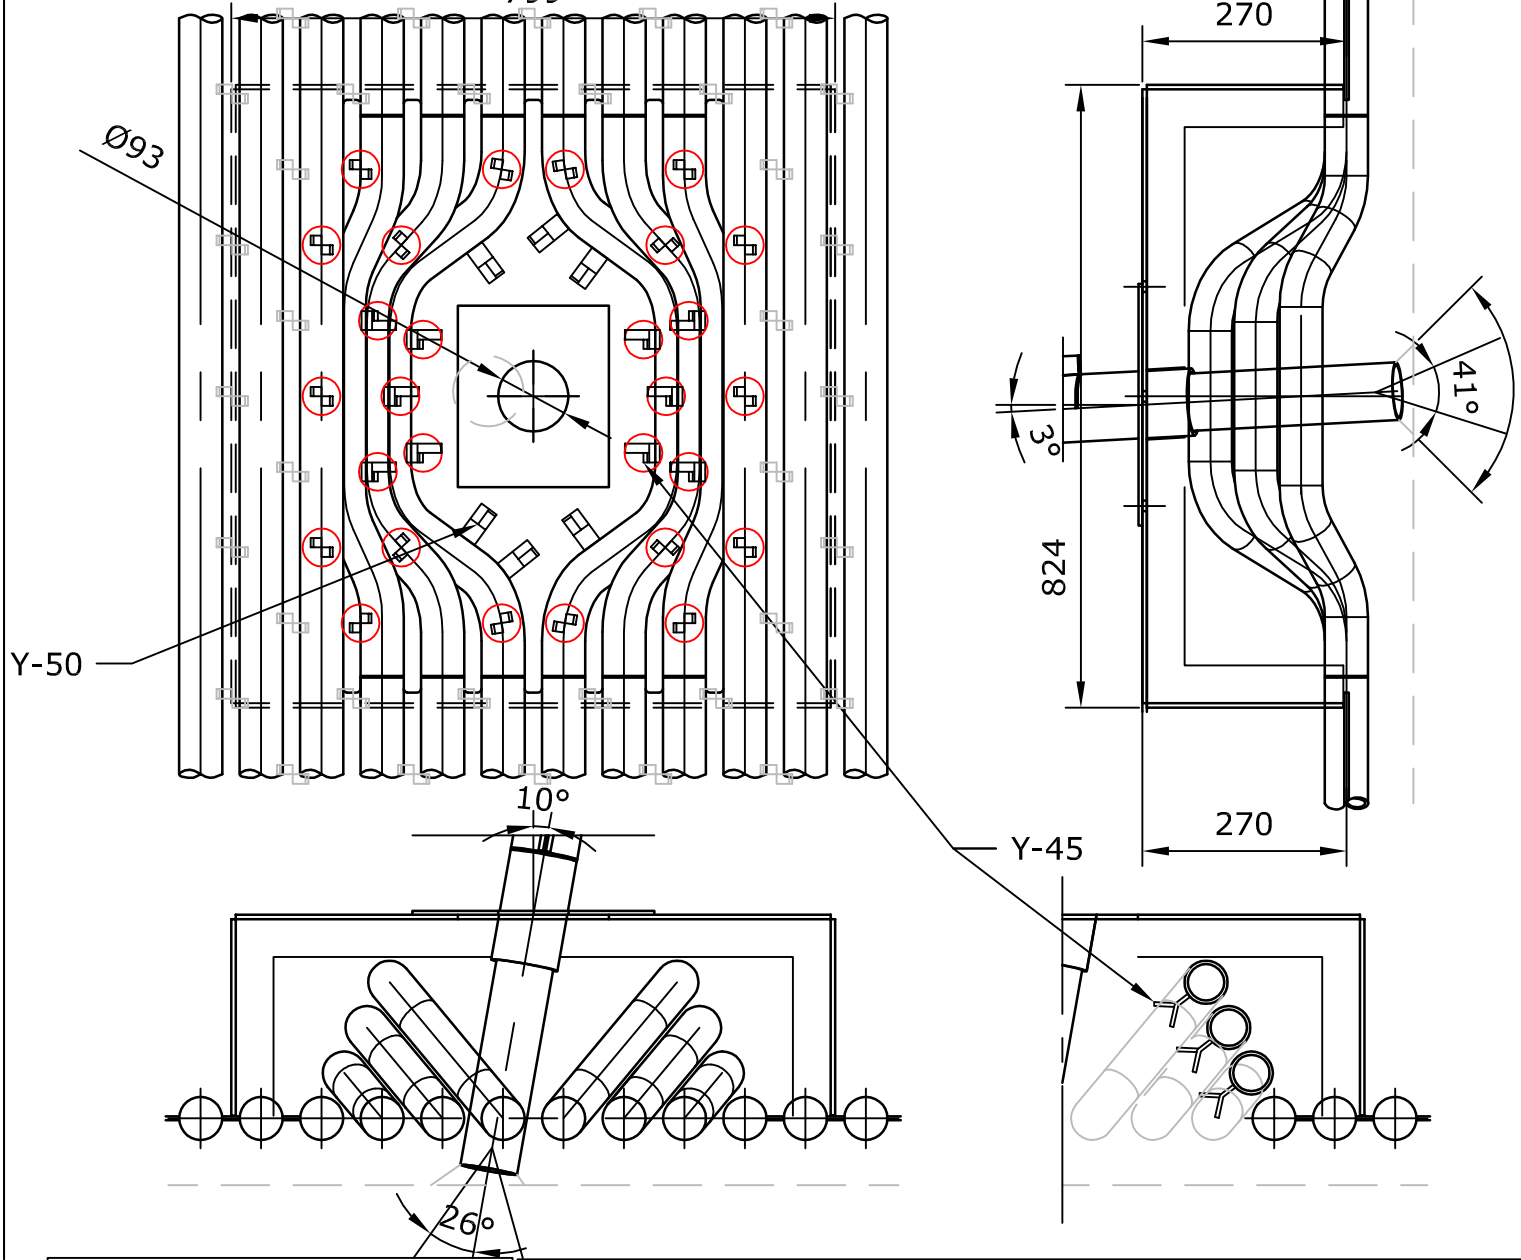

Anchor material: 253 MA 1.4835
a=3mm



WYMURÓWKA KOTŁA 20